

### PUBLIC VENUES MARKET APPLICATIONS

# **Outdoor Gate Control**



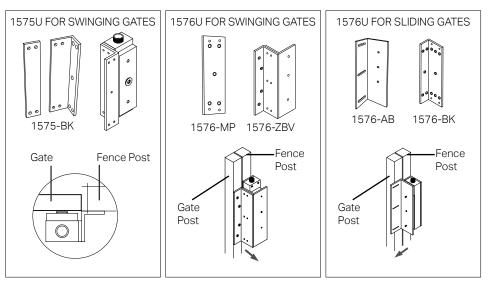

The use of a hydraulic gate closer is highly recommended for swinging gate applications.

### **1** 1575 / 1576 Series

### **Electromagnetic Gate Locks**

1575U	Single Gate Lock
1576U	Single Gate Lock, Face-Drilled



1,200lb holding force Weatherized

Monitoring standard

## **2** 926 Series

### **Outdoor Digital Keypads**

926 Standalone, Self-Contained

> Surface wall or post • mount Weather and vandal resistant 500 users •

## **3** MSB550 Series

### **Mechanical Switch Bars**

Mechanica	Jowice	
MSB550-2W	/V36	Weatherized, 36"
MSB550-2W	/V42	Weatherized, 42"
MSB550-2W	/V48	Weatherized, 48"
PUSH TO EXIT		<ul> <li>1⁄₀" total bar movement</li> </ul>
PUSITORS		<ul> <li>Heavy duty aluminum extrusion</li> </ul>
		<ul> <li>Metal end caps</li> </ul>
5 460 S		
Capacitive	Touch	Sensors
Capacitive 463NU	<b>Touch</b> Narrow	N Sensors
Capacitive	Touch	N Sensors
Capacitive 463NU	Touch Narrov Single	a Sensors w Gang grated adjustable
Capacitive 463NU 463U	Touch Narrov Single • Inte time • Sele	a Sensors w Gang grated adjustable

Adjustable timer or

alternate action

•

### 4 602 Series

#### **1 Amp Power Controllers**

602RF	Controller with Cabinet	
RB12V4	12V/5Ah Battery	
RB12V4-2	12V/5Ah Battery, Qty 2	
	<ul> <li>Regulated and filtered linear DC power</li> </ul>	
1 C	<ul> <li>Field selectable dual voltage (12/24 VDC)</li> </ul>	
	Fire/emergency release	

input

SELECT ONE
<b>5</b> 480 Series

### **Push Plate Actuators**

48201U	Narrow, PUSH TO OPEN
482O2U	Single Gang, PUSH TO OPEN
48204U	41/2" Square, PUSH TO OPEN
PUSH TO OPEN OPEN	<ul><li>PUSH-TO-OPEN</li><li>Recessed, surface and bollard mounting</li></ul>