


[t] 800.413.8783 
805.494.0622 
E-mail: service@sdcsecurity.com 
801 Avenida Acaso, Camarillo, CA 93012 
PO Box 3670, Camarillo, CA 93011

# INSTALLATION INSTRUCTIONS

## EK402 & GK402 DUMMY TRIM LEVER HANDING & MOUNTING


### CHANGE HAND OF LEVER HANDLE

- 1. Turn lever handle to the right or left direction to meet door handing (Fig. 1).
- 2. Insert the square spindle into the hub (Fig. 2).
- 3. Proceed with Escutcheon Trim Device instructions.

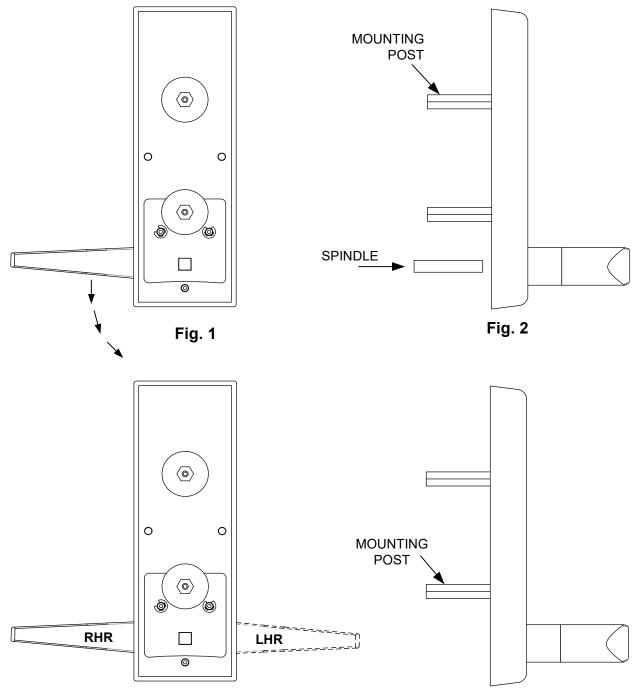



[t] 800.413.8783 • 805.494.0622 • E-mail: service@sdcsecurity.com • 801 Avenida Acaso, Camarillo, CA 93012 • PO Box 3670, Camarillo, CA 93011

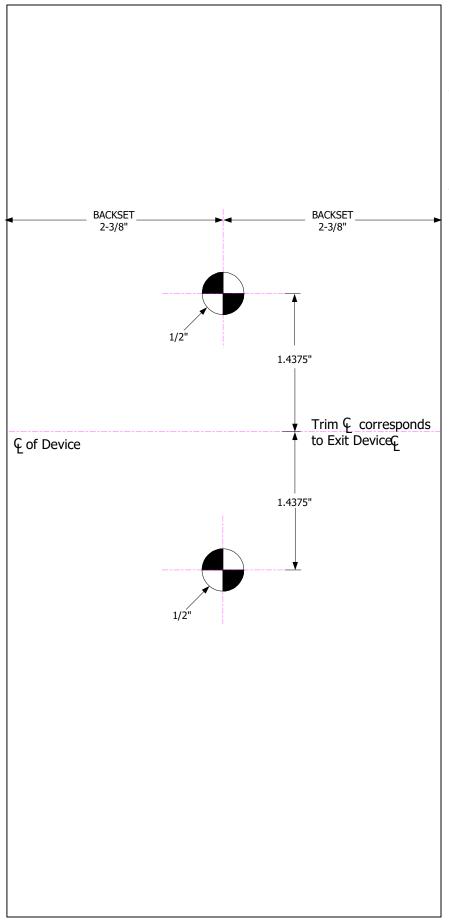

### Simple Instructions:

- 1. Use the corresponding drills at indicated locations. Drill holes through the door to accept the two escutcheon locator pins and the spindle.
- 2. Fasten the supplied mounting screws into the hex standoffs on the trim, from the inside of the door. The two screws must go through the chassis of the exit device.

#### NOTE:

 For single doors and double doors with mullion, use the backset dimension of 2-3/8" to FACE OF STOP.

> EK402, GK402 TEMPLATE DUMMY TRIM (DIMENSIONAL DRAWING ONLY NOT TO SCALE)